

Anhydrous Ammonia Shorty - (NH₃) The shorty

2,000 wg



Tank Features:



Eyewash Container

Our tanks are equipped with permanently attached stainless steel brackets for top and sidemount eye wash container and safety kit (sold separately).


- 2000 NH₃ 60" O.D. x16' 0" O.A.L. 120" leg space
- 8' shorter than standard 2000 NH₃ tank
- Front valve/gauge arrangement with removable guard
- Standard (2) A502-45 gpm 1 1/2" x1 1/2" Liquid Withdrawal Valve(s)
- Advanced combo 85% percentage Liquid Level/Pressure Gauge
- Standard (2) fill valves

For more information
888 558 8225



Anhydrous Ammonia Shorty - (NH₃) The shorty

2,000 wg

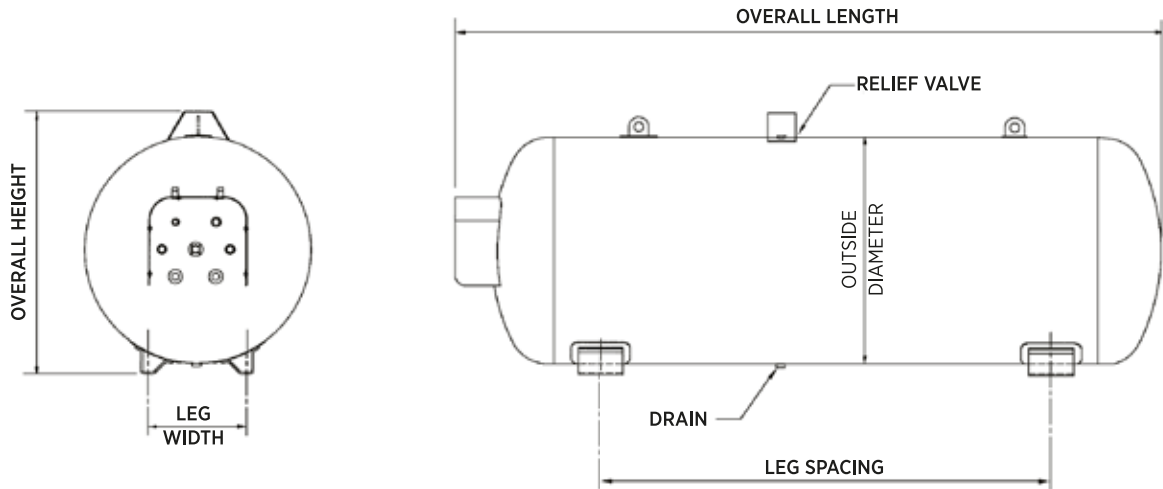


GENERAL SPECIFICATIONS

Rated at 250 psig from -20° F. to 125° F.

Vessel is externally blasted per SSPC-SP6 and externally coated with ArcClad[®] Acrylic Polyurethane

All coupling and openings double pass welded and located in the head of the tank

Standard Stainless Steel Float Gauge

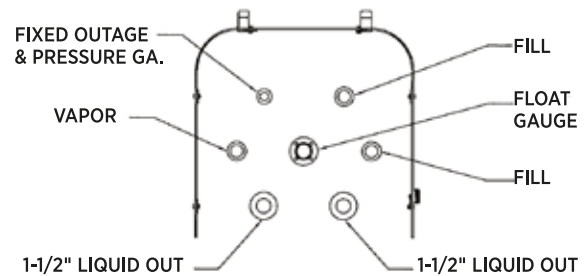

FITTING LAYOUT UNDER FITTING COVER

NH₃ NURSE TANK DIMENSIONAL INFORMATION

Water Capacity	Outside Diameter	Head Type	Overall Length	Overall Height	Leg Width	Leg Spacing	Weight	Quantity in Full Load
2,000 wg, 7,570.0 L	60" 1,524 mm	Ellip	15' - 7 15/16" 4,773.6 mm	5' - 9 1/2" 1,765.3 mm	26 1/8" 663.5 mm	10' - 0" 3,060.7 mm	4,965 lbs. 2,252.1 kg.	3

All vessels dimensions are approximate. Individual vessels may vary.

Rev: April 18, 2016