

# UNDERGROUND DOMESTIC TANKS

Standard WG offering:  
120 - 2000 WG  
Standard color:  
Redox



## GENERAL SPECIFICATIONS

Designed and built to ASME Section VIII, Division 1  
Complies with NFPA 58 & registered with national board  
Rated at 250 PSI from -20° to 125°F  
Vacuum purged - Ready to fill  
Choice of Rego or Cavagna valves  
Rochester liquid level gauges standard with steel gears  
Superior powder coated finish  
Underground black plastic shroud and lid included with purchase (standard)  
Boom crane delivery standard


### \*NOTES

Vessel finished with white powder paint must be installed aboveground only  
Vessel finished with red powder must be buried with proper cathodic protection (sold separately) and coating must be continuous/uninterrupted and must comply with federal, state, and local code



2999 Olympus Blvd  
Suite 450  
Dallas, TX 75019

888 558 8225  
[customerservice@triarccorp.com](mailto:customerservice@triarccorp.com)

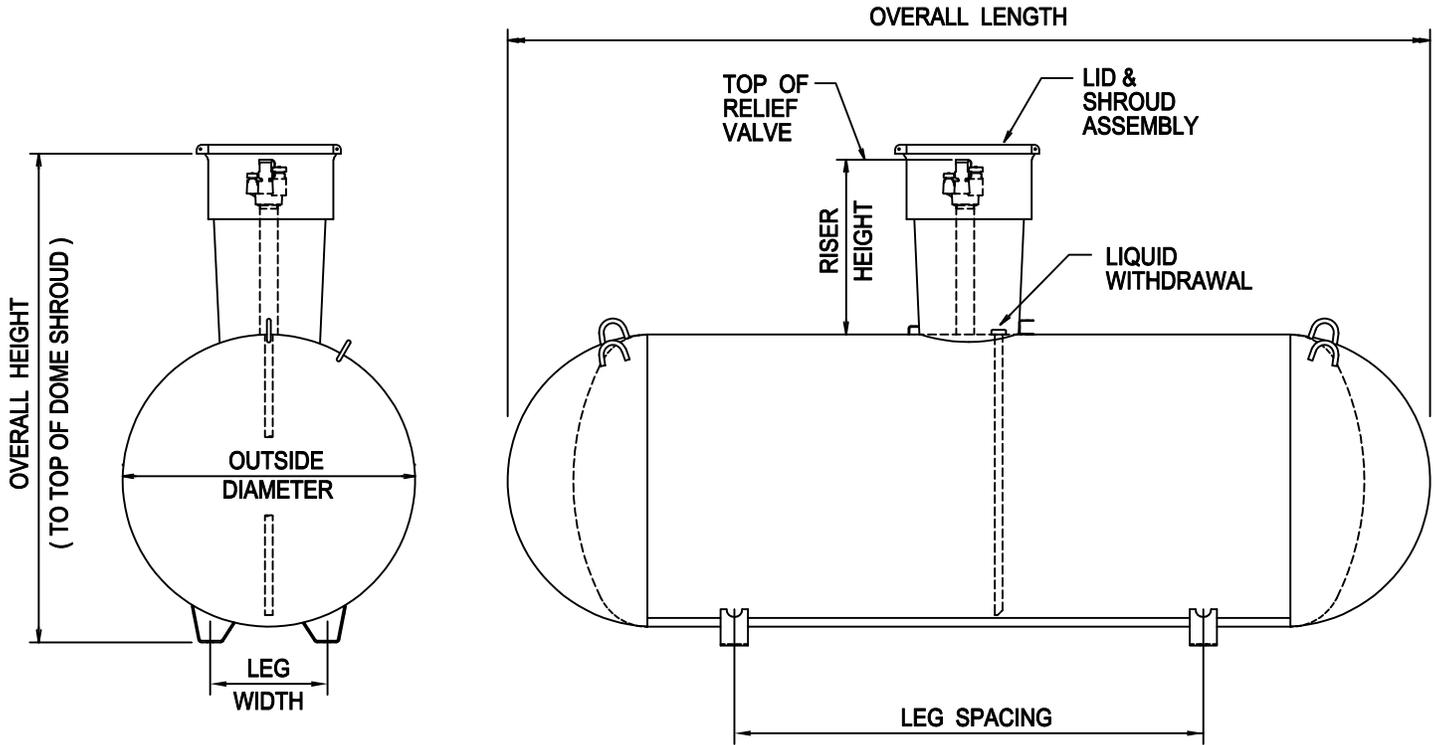

### UNDERGROUND VESSEL DIMENSIONAL INFORMATION

Water Capacity	Outside Diameter	Head Type	Overall Length	Overall Height		Leg Width	Leg Spacing	Weight	Quantity	
				14" Riser height	28"				Full Load	Per stack
*120 wg.	24"	Ellip	5' - 5 7/8"	3' - 4 5/8"	4' - 6 3/4"	10 1/8"	3' - 0"	268 lbs.	63	9
*250 wg.	31.5"	Hemi	7' 2 1/2"	4' 0 5/8"	5' - 2 1/16"	12 3/4"	3' - 6"	490 lbs.	42	7
*320 wg.	31.5"	Hemi	8' - 11 3/4"	4' - 0 5/8"	5' - 2 1/16"	12 3/4"	4' - 0 1/4"	610 lbs.	28	7
500 wg.	37.42"	Hemi	9' - 10"	4' - 6 1/2"	5' - 8 1/8"	15"	5' - 0"	921 lbs.	25	5
1000 wg.	40.96"	Hemi	15' - 10 7/8"	4' - 9 1/2"	6' - 0"	16 1/4"	9' - 0"	1,760 lbs.	15	5
1465 wg.	46.77"	Ellip	17' - 6 7/8"	5' - 3 7/8"	6' - 5"	21"	10' - 0"	2,830 lbs.	6	3
2000 wg.	46.77"	Ellip	23' - 9"	5' - 3 7/8"	6' - 5"	21"	14' - 0"	3,685 lbs.	6	3

All vessels dimensions are approximate.